

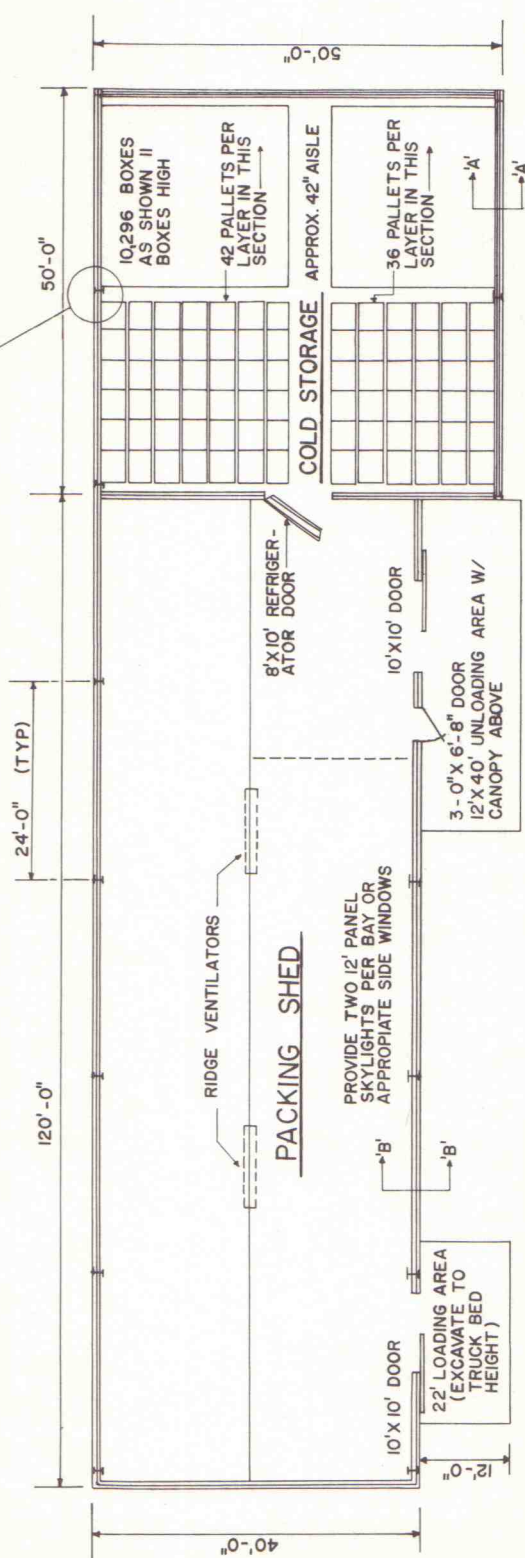
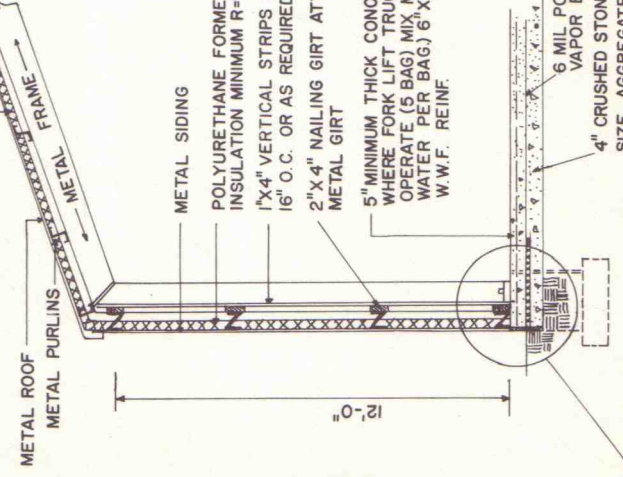
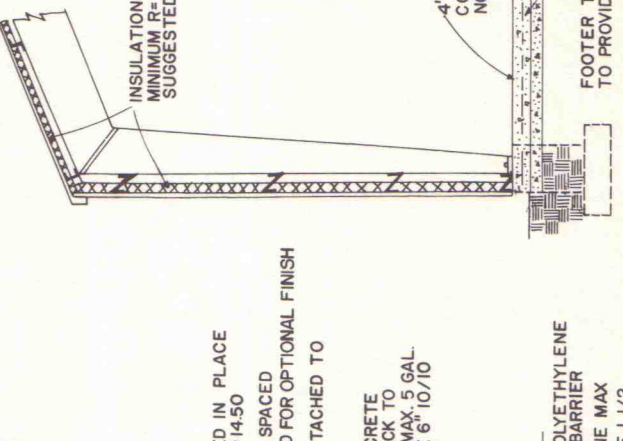


SEE DETAIL '2'-2' FOR PLAN OF PIER BELOW SLAB SHOWING INSULATION (TYPICAL FOR ALL COLUMNS IN COLD STORAGE)

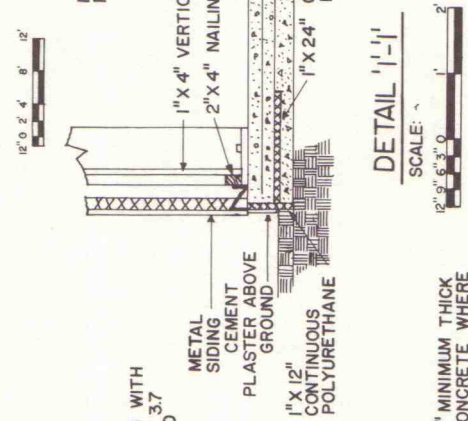

FLOOR PLAN

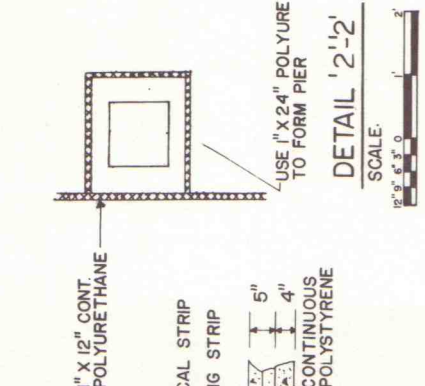

SEE ENLARGED DETAIL '1'-1'

SECTION 'A-A'

SCALE: 12" = 6'-0"

SECTION 'B-B'

SCALE: 12" = 6'-0"

FOOTER TO BE SPECIFIED BY FRAME MANUFACTURER TO PROVIDE 30 P.S.F. SNOW LOAD 15 P.S.F. WIND LOAD

NO VEHICLES USED

6" MIL. POLYETHYLENE VAPOR BARRIER

4" CRUSHED STONE

6" X 6" 10/10 W.F. REINF.

4" MINIMUM THICK CONCRETE

1" X 12" CONT. POLYURETHANE

1" X 24" CONT. POLYURETHANE TO FORM PIER